
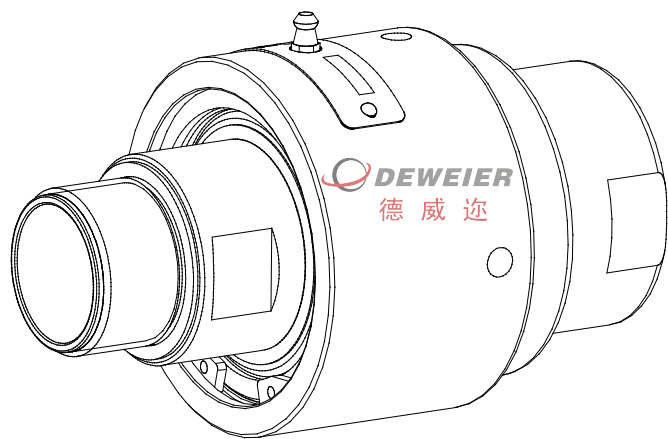


DGR40-1900-03R

右旋RH

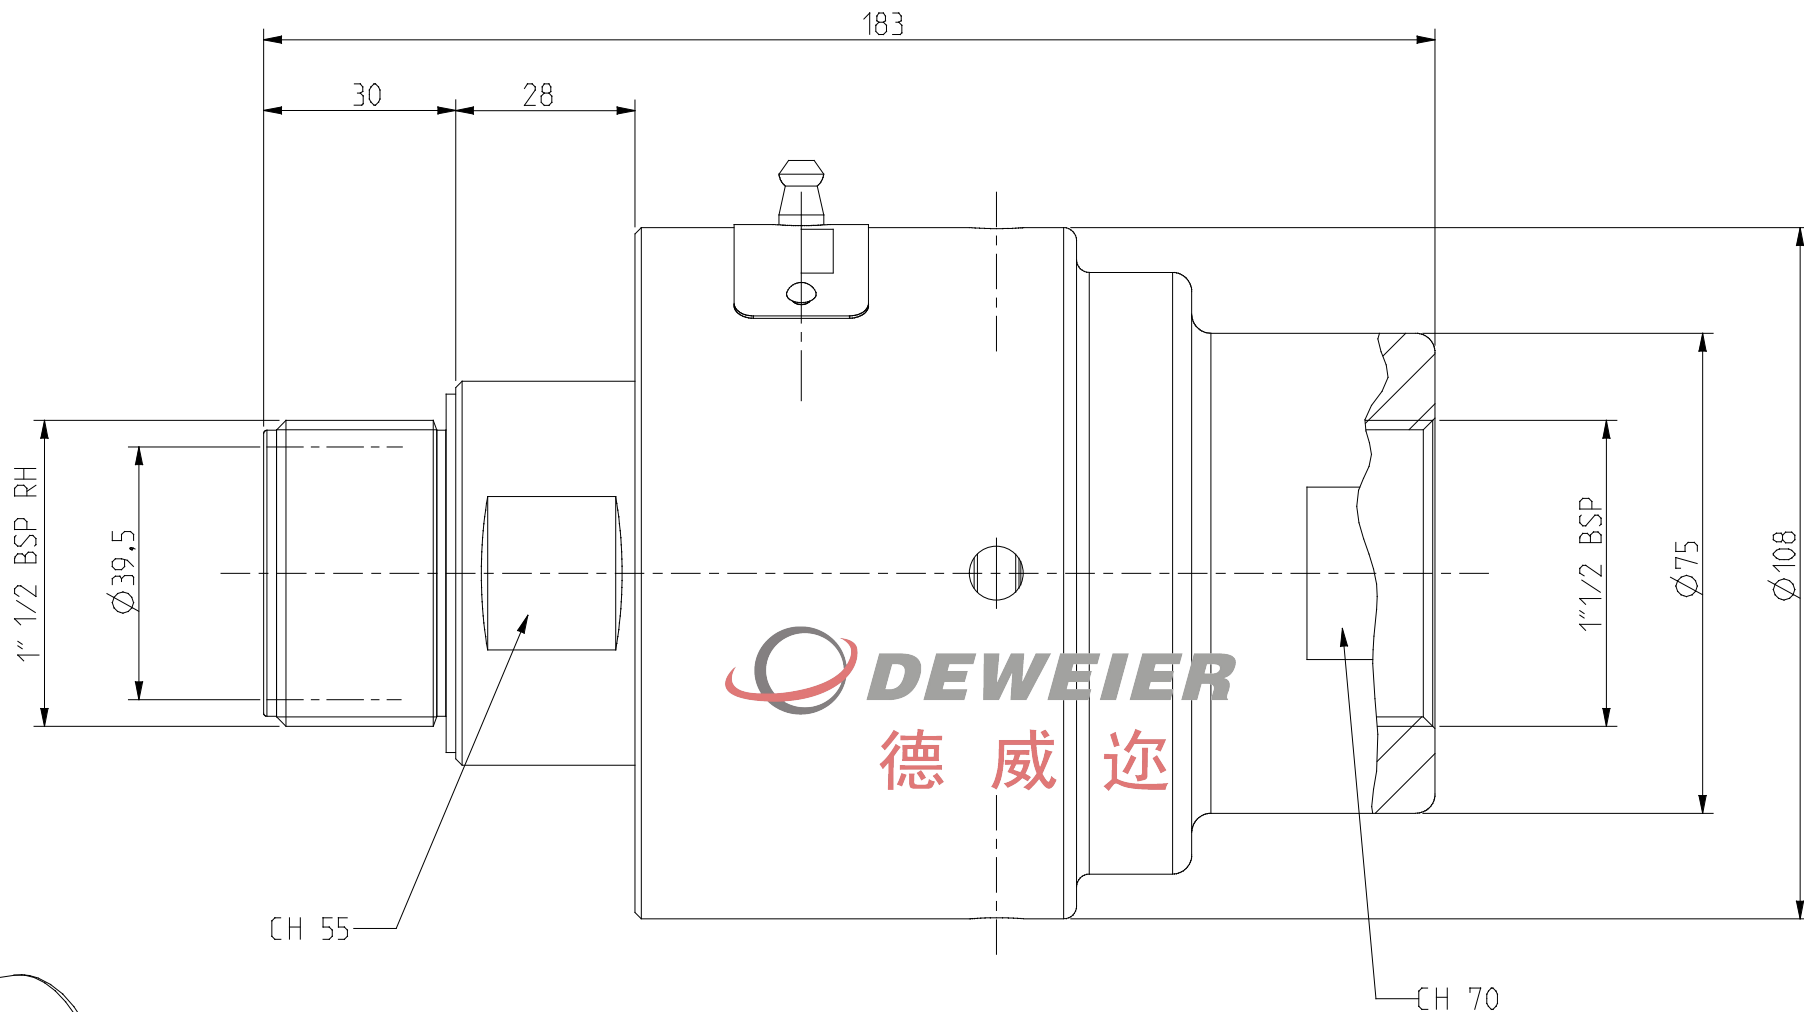

枣庄市德威迩机械科技有限公司

Dewel Machinery Technology Co., Ltd.

技术参数 TECHNICAL PARAMETERS

MAX. PRESSURE	2.0MPa; (20Bar)
MAX. SPEED	2500RPM;
TEMPERATURE	-30℃----+120℃
MEDIA TYPE 介质	water/Hot water/air/oil
	热水/冷却水/压缩空气/油品


备注：技术参数数据为最大值,并不能同时使用;
The technical parameter data is the maximum value and cannot be used at the same time.

使用参数 Working parameters

介质 Fluid	压力 Pressure	温度 Temperature	转速 Rotating speed
空气 Air	1.0MPa;	-30℃----+120℃	1500RPM
水 Water	1.1MPa;	-30℃----+120℃	2500RPM
Double high-precision groove ball bearings for high stability. Balanced mechanical sealing structure for prolonged service life. Standard Sic/Carbon Graphite sealing pair for good sealing performance. Optional Sic/Sic, Tungsten carbide/Tungsten carbide and other sealing pairs for strict environment.			



订货编号 Order-No.

Copper 铜壳	Aluminum 铝壳	Stainless 不锈钢壳
DGR40-1901-03R	DGR40-1902-03R	DGR40-1903-03R
适用介质: 水/热水/油品等 Applicable medium: water/hot water/oil	适用介质: 压缩空气/液压油等 Applicable medium: compressed air hydraulic oil	适用介质: 冷却水/切削液 Applicable medium: water/cutting fluid
旋转接头 Rotary joint E-mail: sddeweier88@163.com		DEWEIER 德威迩 www.sddeweier.com
 TEL: +86 632 5822778 TEL: +86 632 5832779		P/N:DGR40-1900-03R