

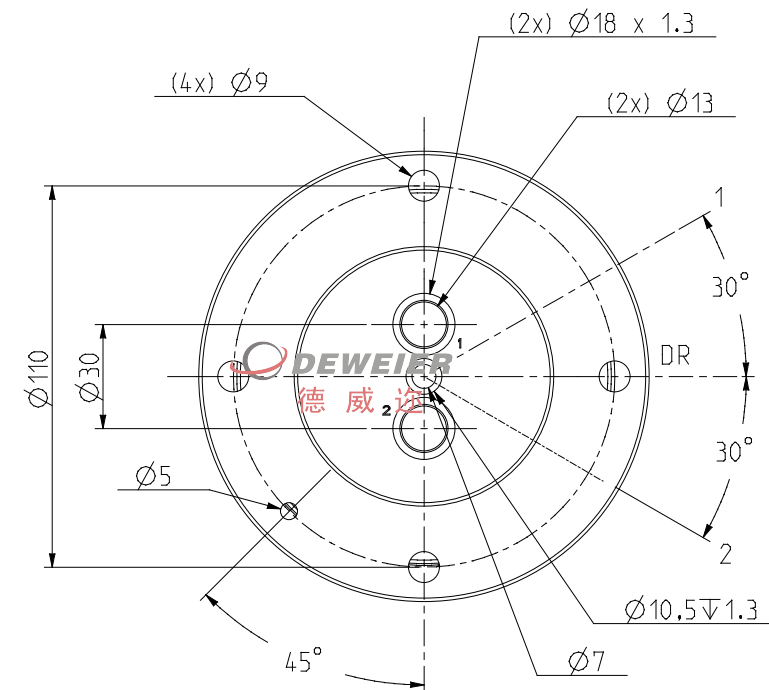


DRM0215-1800-38F

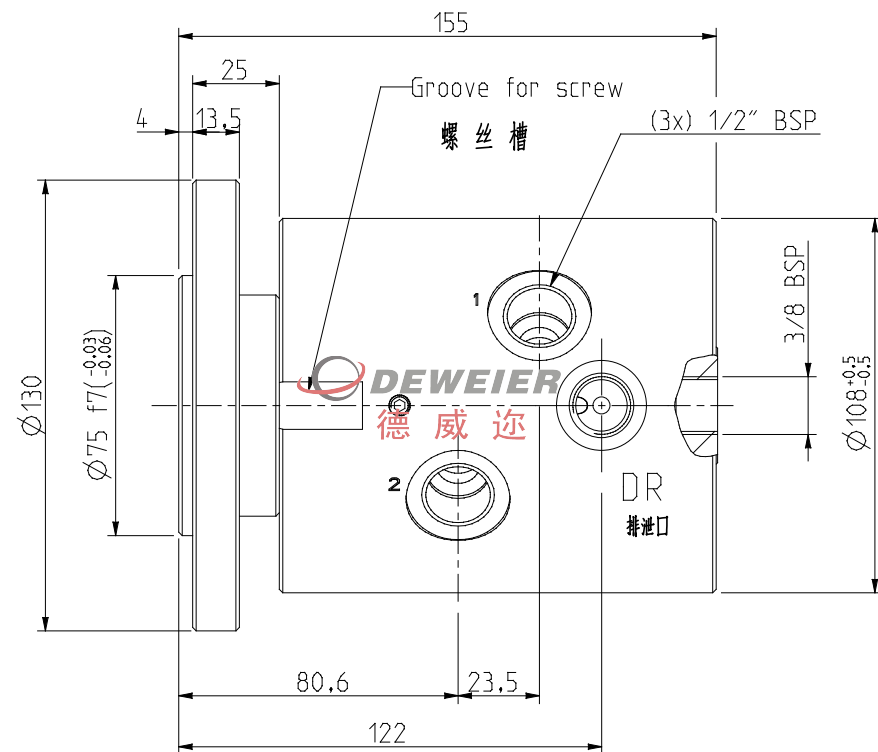

含中央供给口：2+1

Central supply port : 2+1

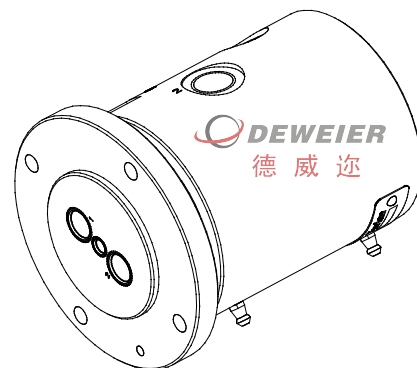

枣庄市德威迩机械科技有限公司

Dewel Machinery Technology Co., Ltd.

技术参数 TECHNICAL PARAMETERS

使用参数 Working parameters

MAX. PRESSURE	25MPa; <25Bar
MAX. SPEED	250RPM;
TEMPERATURE	-20℃----+80℃
MEDIA TYPE 介质	Hydraulic oil/water/air 液压油/冷却水/压缩空气

介质 Fluid	压力 Pressure	温度 Temperature	转速 Rotating speed
空气 Air	1.0MPa:	80℃	150RPM
水 Water	4.0MPa:	80℃	50RPM
液压油 Hydraulic oil	7.0MPa:	80℃	200RPM
	25MPa:	80℃	100RPM

DRM采用专业开发的低摩擦密封件, 从而实现了低转矩、顺滑的旋转动作。此接头是兼具了高刚性高耐久、高密封性的。

德威迩公司独创的长寿命旋转接头, 供给口数量可选择2、3、4、5、6供给口

DRM uses a professionally developed low-friction seal to achieve low torque and smooth rotation. This joint is a long-life rotary joint that is unique in its combination of high rigidity, high durability and high sealing.

1

2

3

4

5

6



订货编号 Order-No.

Copper 铜壳

Aluminum 铝壳

DRM0215-1801-38F

DRM0215-1802-38F

适用介质: 高压水/液压油等

Applicable medium:
High pressure water
hydraulic oil

适用介质: 压缩空气/液压油等


Applicable medium:
compressed air
hydraulic oil

多通道旋转接头
Multi-Passage Rotary joint

E-mail: sddeweier88@163.com

DEWEIER
德威迩

www.sddeweier.com



TEL: +86 632 5822778
TEL: +86 632 5832779

P/N: DRM0215-1800-38F