
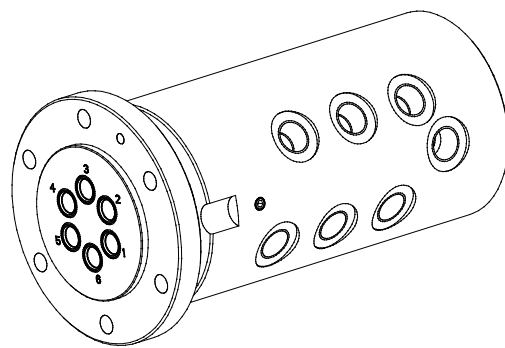
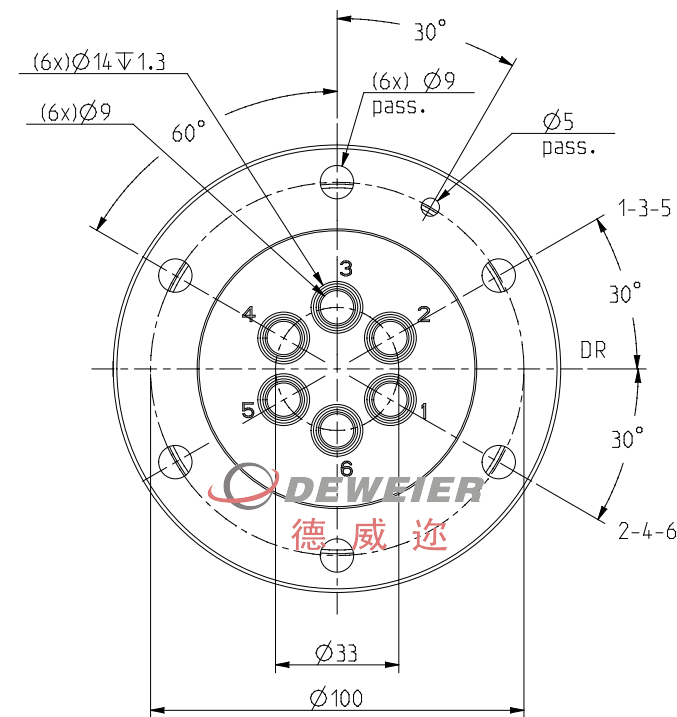


DRM0610-1800-00F

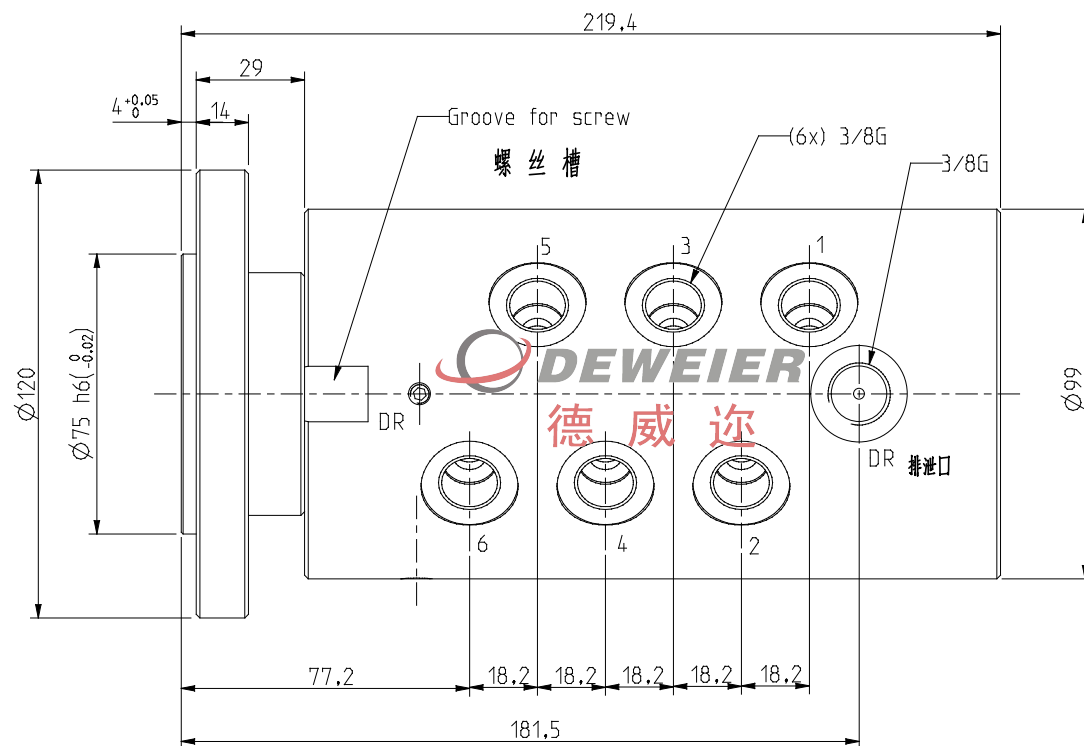

枣庄市德威迩机械科技有限公司

Dewel Machinery Technology Co., Ltd.

技术参数 TECHNICAL PARAMETERS

MAX. PRESSURE	25MPa; <25Bar
MAX. SPEED	250RPM;
TEMPERATURE	-20℃----+80℃
MEDIA TYPE 介质	Hydraulic oil/water/air 液压油/冷却水/压缩空气

备注：技术参数数据为最大值,并不能同时使用;
The technical parameter data is the maximum value and cannot be used at the same time.

使用参数 Working parameters

介质 Fluid	压力 Pressure	温度 Temperature	转速 Rotating speed
空气 Air	1.0MPa:	80℃	20RPM
水 Water	4.0MPa:	80℃	15RPM
液压油 Hydraulic oil	7.0MPa:	80℃	80RPM
	25MPa:	80℃	30RPM

DRM采用专业开发的低摩擦密封件,从而实现了低转矩、顺滑的旋转动作,此接头是兼具了高刚性高耐久、高密封性的。
德威迩公司独创的长寿命旋转接头,供给口数量可选择2、3、4、5、6供给口

DRM uses a professionally developed low-friction seal to achieve low torque and smooth rotation. This joint is a long-life rotary joint that is unique in its combination of high rigidity, high durability and high sealing.



德威迩企业官网



德威迩业务号

订货编号 Order-No.

Copper 铜壳	Aluminum 铝壳
DRM0610-1801-00F	DRM0610-1802-00F
适用介质: 高压水/液压油等 Applicable medium: High pressure water hydraulic oil	适用介质: 压缩空气/液压油等 Applicable medium: compressed air hydraulic oil
多通道旋转接头 Multi-Passage Rotary joint E-mail: sddeweier88@163.com	DEWEIER 德威迩 www.sddeweier.com
 TEL: +86 632 5822778 TEL: +86 632 5832779	P/N: DRM0610-1800-00F