

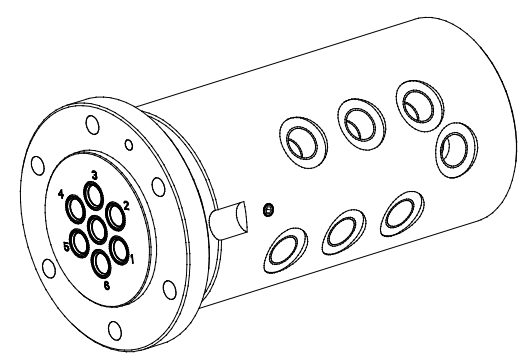


DRM0610-1800-38F

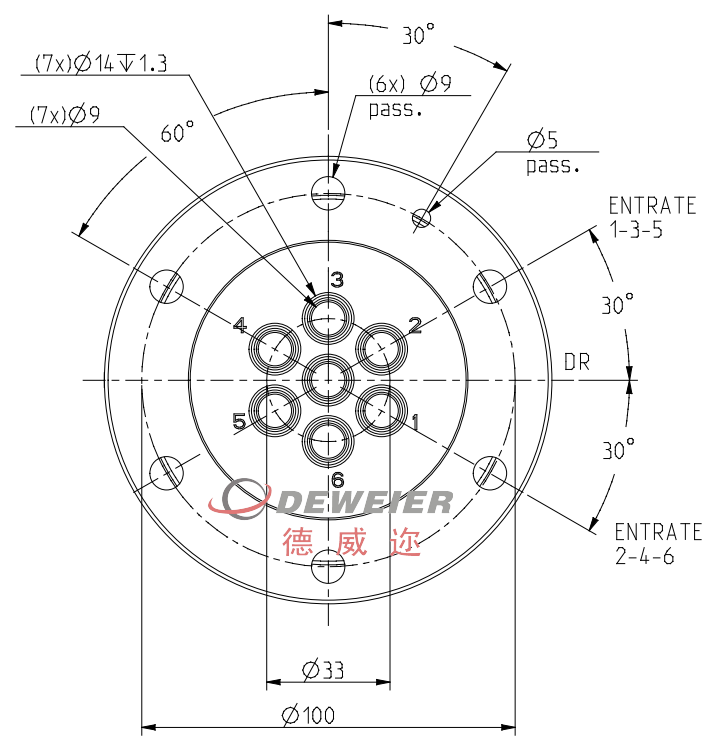

含中央供给口: 6+1
Central supply port: 6+1

枣庄市德威迩机械科技有限公司 Dewel Machinery Technology Co., Ltd.			
技术参数 TECHNICAL PARAMETERS		使用参数 Working parameters	
MAX. PRESSURE	25MPa; <25Bar>	介质 Fluid	压力 Pressure
MAX. SPEED	250RPM;	空气 Air	80℃
TEMPERATURE	-20℃----+80℃	水 Water	80℃
MEDIA TYPE 介质	Hydraulic oil/water/air	液压油 Hydraulic oil	80℃
备注: 技术参数数据为最大值, 并不能同时使用; The technical parameter data is the maximum value and cannot be used at the same time.		德威迩公司独创的长寿命旋转接头, 供出口数量可选择2、3、4、5、6供出口 DRM uses a professionally developed low-friction seal to achieve low torque and smooth rotation. This joint is a long-life rotary joint that is unique in its combination of high rigidity, high durability and high sealing.	

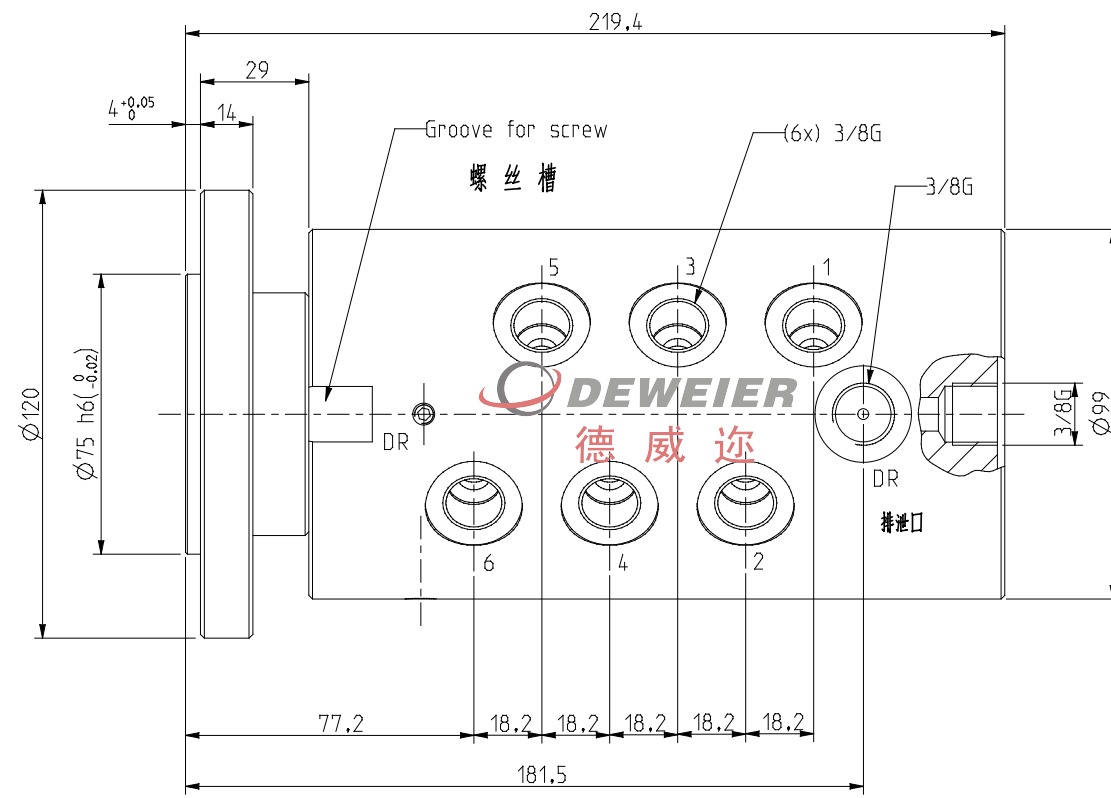

订货编号 Order-No.	
Copper 铜壳	Aluminum 铝壳
DRM0610-1801-38F	DRM0610-1802-38F
适用介质: 高压水/液压油等 Applicable medium: High pressure water hydraulic oil	适用介质: 压缩空气/液压油等 Applicable medium: compressed air hydraulic oil
多通道旋转接头 Multi-Passage Rotary joint	DEWEIER 德威迩
E-mail: sddeweier88@163.com	www.sddeweier.com
TEL: +86 632 5822778 TEL: +86 632 5832779	P/N: DRM0610-1800-38F